

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T1S R1W

1/4


SEC 31 | SEC 32

U.S.B.&M.

C-5



SCALE: 1"=30'

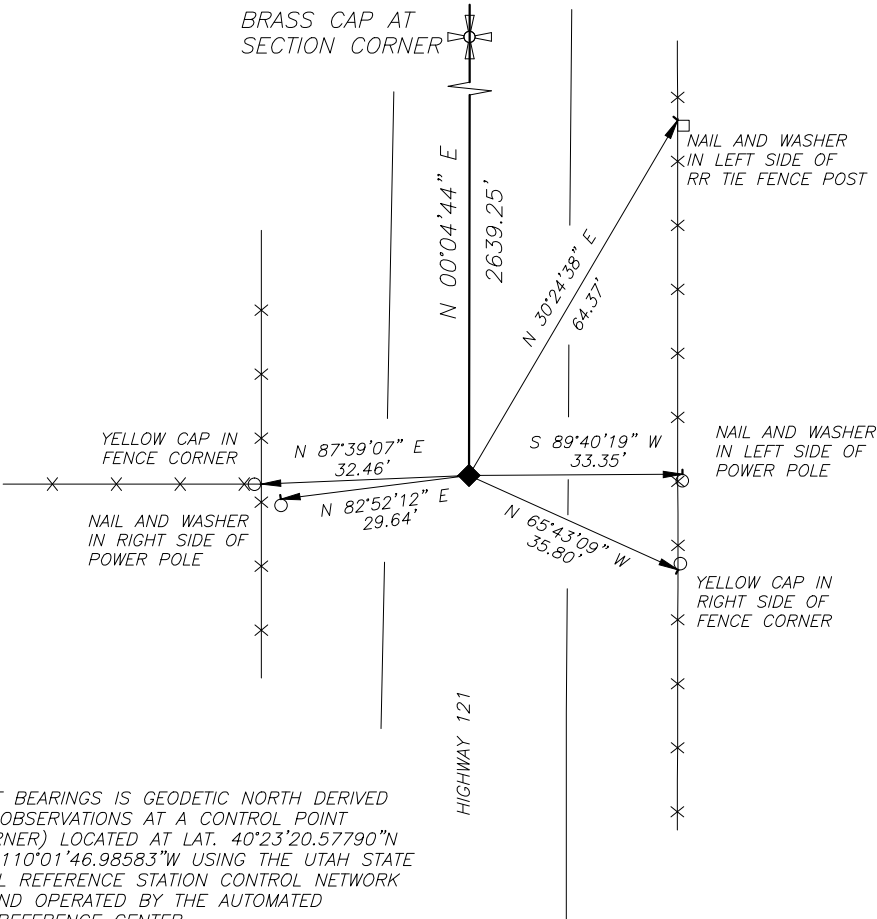

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°23'20.57790"N AND LONG. 110°01'46.98583"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A BOLT AT THE POSITION OF THE 1/4 CORNER AND YELLOW PLASTIC CAPS NAILED TO FENCE CORNERS AS SHOWN

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A MAG NAIL AND WASHER AT THE POSITION OF THE 1/4 CORNER AND NAIL AND WASHER IN POWER POLES AND A RAIL ROAD TIE AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7300638.009
E: 2050180.566
NAVD88 EL: 5447.01'

LATITUDE: 40°21'10.40338" N
LONGITUDE: 110°01'46.76849" W
ELLIPSOID HEIGHT: 5391.29'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300010S0010W0_200140

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

